




## UC400 23 Cat.6

### U/UTP Installation Cable

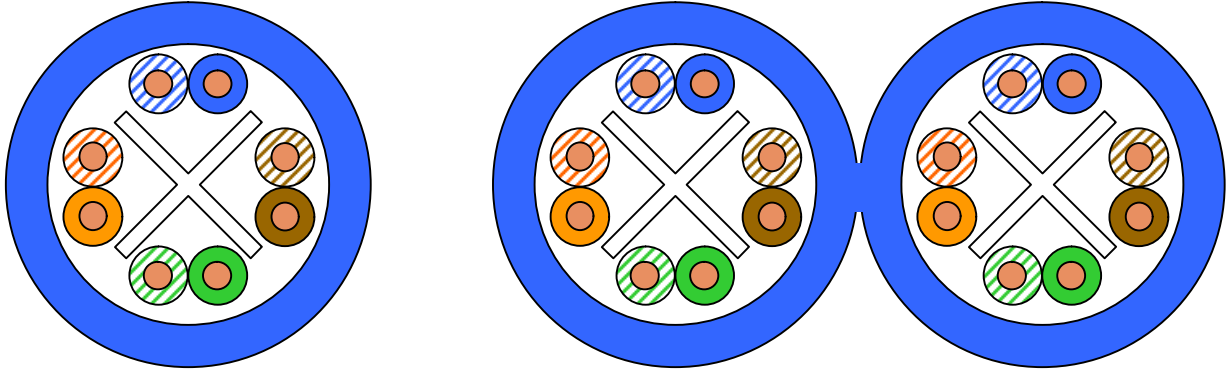

### Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)  
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T;  
IEEE 802.5 16 MB; ISDN; TPDDI; ATM

### Standards


EIA/TIA-568-B.2-1 6/2002.  
ISO/IEC 11801 2<sup>nd</sup> ed.; IEC 61156-5  
EN 50173-1, EN 50288-6-1

### Flame resistance

PVC: IEC 60332-1  
LSHF: IEC 60332-1; IEC 60754-2; IEC 61034

### Construction

Conductor	bare copper wire Ø 0.57 mm (AWG23)
Insulation	Polyethylene, Ø 1.0 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core non metallic cross separator (spline)
Sheath	PVC or LSHF (FRNC, LSOH), blue RAL 5012



## UC400 23 Cat.6

### Mechanical properties

Minimum bending radius	Installation	8 x D
	Installed	4 x D
Temperature range	during operation	-20°C up to + 60°C
	during installation	0°C up to + 50°C

### Electrical properties

at 20°C

DC loop resistance	≤ 176 Ω /km
Resistance unbalance	≤ 2%
Insulation resistance (500 V)	≥ 5000 MΩ *km
Capacitance at 800 Hz	Nom. 48 nF/km
Capacitance unbalance (pair to ground)	≤ 1500 pF/km
Characteristic impedance (1 - 100 MHz)	(100 ± 15) Ω
(100 - 250 MHz)	(100 ± 22) Ω
Nominal velocity of propagation	Approx. 67 %
Propagation delay	Nominal 535 ns/100m
Delay skew	Nominal 20 ns/100m
Test voltage (DC, 1 min)	1000 V
Core/Core	
Coupling attenuation	≥ 40 dB


### Transmission characteristics acc. to Category 6

at 20°C

f (MHz)	Attenuation		NEXT		PS-NEXT		ACR		PS-ACR		ELFEXT		PS-ELFEXT		Return loss
	max.	Nom.	min.	nom.	min.	Nom.	Min.	Nom.	Min.	Nom.	min.	Nom.	min.	Nom.	
1	2.1	1.9	74	78	72	75	72.0	76.1	70.0	73.1	68	82	65	80	20
4	3.8	3.8	65	69	63	66	61.2	65.2	59.2	62.2	56	70	53	68	23
10	6.0	6.0	59	63	57	60	53.0	57.0	51.0	54.0	48	62	45	60	25
16	7.6	7.6	56	60	54	57	48.4	52.3	46.4	49.3	44	58	41	56	25
20	8.5	8.5	55	59	53	56	46.5	50.0	44.5	47.0	42	56	39	54	25
31.2	10.7	10.7	52	56	50	53	41.3	45.0	39.3	42.0	38	52	35	50	23.6
62.5	15.5	15.1	47	51	45	48	31.5	36.0	29.5	33.0	32	46	29	44	21.5
100	19.9	19.1	44	48	42	45	24.1	28.9	22.1	25.9	28	42	25	40	20.1
125	22.5	21.3	43	47	41	44	20.5	25.2	18.5	22.2	26	40	23	38	19.5
155.5	25.4	23.8	42	45	40	42	16.6	21.3	14.6	18.3	24	38	21	36	18.8
175	27.1	25.3	41	44	39	41	13.9	19.1	11.9	16.1	23	37	20	35	18.4
200	29.2	27.0	40	44	38	41	10.8	16.5	8.8	13.5	22	36	19	34	18.0
250	33.0	32.0	38	42	36	39	5.0	10.0	2.0	7.0	20	34	17	32	17.3
300		36.1		41		38		4.8		1.8		32		30	
400		41.7		39		36		-2.7		-5.7		30		28	

### Technical data

[www.drakact.com](http://www.drakact.com) | [www.draka.com](http://www.draka.com)[koeln.info@draka.com](mailto:koeln.info@draka.com)



## UC400 23 Cat.6

Product code	Designation	Product name	Outer diameter mm	Fire load		Weight kg/km	Copper content kg/km	Tensile force N
				MJ/km	kWh/m			
1000134	J-2YY 4x2x0.56	UC400 23 Cat.6 4P	6.2	358	0.099	39	20,5	100
1000625	J-2YH 4x2x0.56	UC400 23 Cat.6 4P LSHF		329	0.091	40		
1000927	J-2YY 2x4x2x0.56	UC400 23 Cat.6 2x4P	12.4	716	0.198	78	41	200
1000629	J-2YH 2x4x2x0.56	UC400 23 Cat.6 2x4P LSHF		658	0.192	80		