


## Product information

### E2000 Adapters

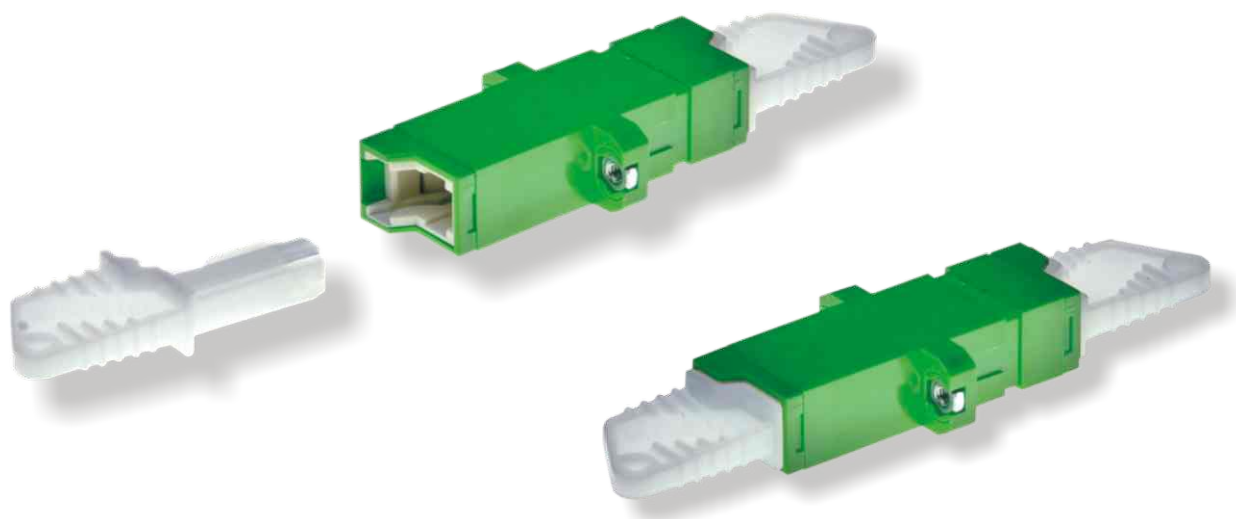

Type	Color	Sleeve	Mount	Index
Adapter SM E2000 APC Duplex R&M plastic	green	ceramic	the screw	104ADSEA
Adapter MM E2000 Simplex R&M plastic	beige	ceramic	the screw	104AMSEO
Adapter MM E2000 Simplex R&M plastic	beige	ceramic	with snaps	104AMSEO.1
Adapter SM E2000 PC Simplex R&M plastic	blue	ceramic	the screw	104ASSEO
Adapter SM E2000 PC Simplex R&M plastic	blue	ceramic	with snaps	104ASSEO.1
Adapter SM E2000 APC Simplex R&M plastic	green	ceramic	the screw	104ASSEA
Adapter SM E2000 APC Simplex R&M plastic	green	ceramic	with snaps	104ASSEA.1

## Parameters

	Singlemode	Multimode
Housing	plastic	
Sleeve	Zirconia ZrO2	Zirconia ZrO2
Max insertion loss	0,15dB	0,20dB
Insertion loss increase after 500 cycles	0,2dB	
Operating temperature	-40 do +80°C	
Fire resistance	UL94-V0	

## Product information

### FC Adapters




Type	Index
Adapter MM FC Simplex	104ASM40
Adapter SM FC Simplex	104ASS40

## Parameters

	Singlemode	Multimode
Housing	metal	
Sleeve	Zirconia ZrO2	Phospor bronze
Color	metallic	
Max insertion loss	0,15dB	0,20dB
Retentions force	200-600 grams	
Insertion loss increase after 500 cycles	0,2dB	
Operating temperature	-40 do +80°C	
Fire resistance	UL94-V0	

## Product information

### LC Adapters

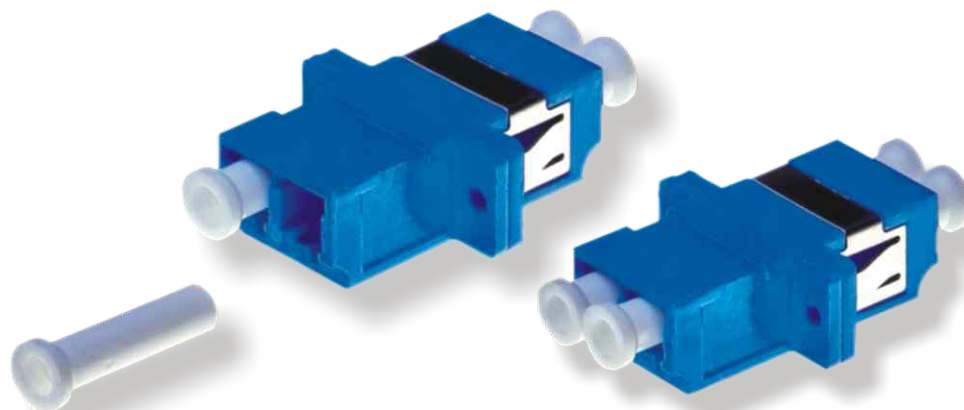


Type	Index
Adapter MM LC Duplex beige	104ADM60
Adapter MM LC Duplex aqua	104ADM6A
Adapter SM LC Duplex blue	104ADS60
Adapter SM LC APC Duplex gree	104ADS70
Adapter MM LC quad beige	104AQM60
Adapter SM LC quad blue	104AQS60
Adapter SM LC APC quad green	104AQS70

## Parameters

	Singlemode	Multimode
Housing	plastic	
Sleeve	Zirconia ZrO <sub>2</sub>	Phospor bronze
Color	blue or green (APC)	beige or aqua
Max insertion loss	0,15dB	0,20dB
Retentions force	200-600 grams	
Insertion loss increase after 500 cycles	0,2dB	
Operating temperature	-40 do +80°C	
Fire resistance	UL94-V0	

## Product information

### SC Adapters

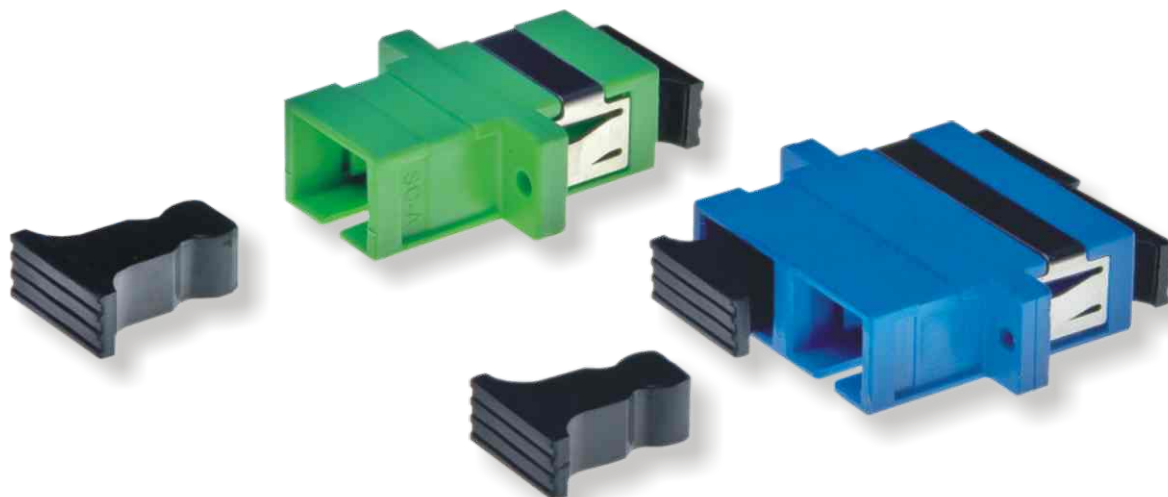

Type	Index
Adapter MM SC Simplex beige	104ASM20
Adapter MM SC Simplex aqua	104ASM2A
Adapter SM SC Simplex blue	104ASS20
Adapter SM SC APC Simplex green	104ASS30
Adapter MM SC Duplex beige	104ADM20
Adapter MM SC Duplex aqua	104ADM2A
Adapter SM SC Duplex blue	104ADS20
Adapter SM SC APC Duplex green	11330140

## Parameters

	Singlemode	Multimode
Housing	plastic	
Sleeve	Zirconia ZrO2	Phospor bronze
Color	blue or green (APC)	beige or aqua
Max insertion loss	0,15dB	0,20dB
Retentions force	200-600 grams	
Insertion loss increase after 500 cycles	0,2dB	
Operating temperature	-40 do +80°C	
Fire resistance	UL94-V0	

## Product information

### ST Adapters



Type	Index
Adapter MM ST Simplex	104ASM10
Adapter SM ST Simplex	104ASS10

## Parameters

	Singlemode	Multimode
Housing	metal	
Sleeve	Zirconia ZrO2	Phospor bronze
Color	metallic	
Max insertion loss	0,15dB	0,20dB
Retentions force	200-600 grams	
Insertion loss increase after 500 cycles	0,2dB	
Operating temperature	-40 do +80°C	
Fire resistance	UL94-V0	