




## UC900 HS23 Cat.7

### S/FTP

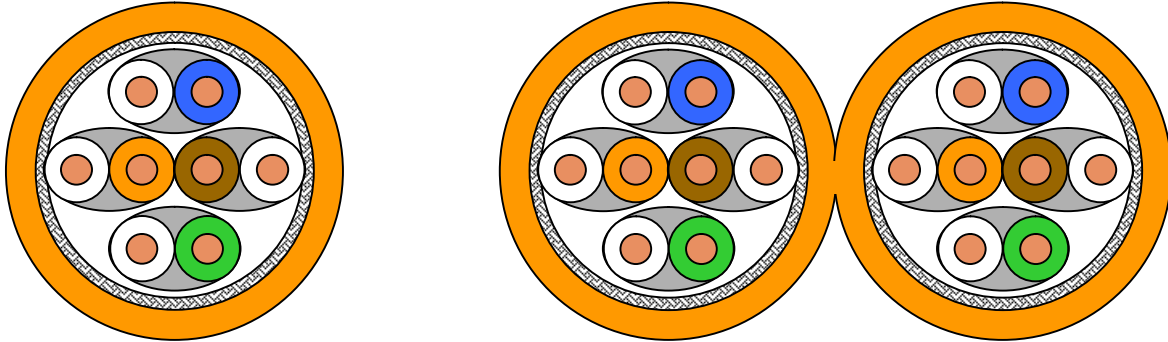

### Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)  
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T  
IEEE 802.5 16 MB; ISDN; TPDDI; ATM

### Standards

EN 50173-1; EN 50288-4-1  
ISO/IEC 11801; IEC 61156-5

### Flame resistance

LSHF (LSOH): IEC 60332-1; IEC 60754-2; IEC 61034  
LSHF-FR (LSOH-FR): IEC 60332-1; IEC 60332-3-24; IEC 60754-2; IEC 61034

### Construction

Conductor	bare copper wire, Ø 0.56 mm (AWG 23)
Insulation	Foamskin PE, Ø 1.35 mm
Twisting	2 cores to the pair
Pair screen	Al-laminated plastic foil
Cable lay up	4 pairs (PiMF) to the core
Screen	copper braid, tinned (ca. 40 % coverage)
Sheath	LSHF or LSHF-FR, orange



## UC900 HS23 Cat.7

### Mechanical properties

Bending radius	without load	≥ 30 mm
	with load	≥ 60 mm
Temperature range	during operation	-20°C to + 60°C
	during installation	0°C to + 50°C

### Electrical properties

at 20°C ± 5°C

Loop resistance		≤ 165 Ω/km
Resistance unbalance		≤ 2%
Insulation resistance	(500 V)	≥ 2000 MΩ*km
Mutual capacitance	at 800 Hz	Nom. 43 nF/km
Capacitance unbalance	(pair/ground)	≤ 1500 pF/km
Characteristic impedance	(1-100 MHz)	(100 ± 5) Ω
	(100 - 250) MHz	(100 ± 10) Ω
	(250 - 600) MHz	(100 ± 15) Ω
Nominal velocity of propagation		ca. 79 %
Propagation delay		≤ 427 ns/100m
Delay skew		≤ 12 ns/100m
Test voltage	(DC, 1 min) core/core and core/screen	1000 V
Transfer impedance	at 1 MHz	20 mΩ/m
	at 10 MHz	30 mΩ/m
	at 30 MHz	40 mΩ/m
	at 100MHz	200 mΩ/m
Coupling attenuation		75 dB

### Electrical data (nominal)

acc. to Cat.7 (at 20°C)

F (MHZ)	Attenuation (dB/100m)	NEXT (dB)	PS-NEXT (dB)	ACR (dB/100m)	PS-ACR (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	Return loss (dB)
1,0	1,8	100	97	98	95	105	105	-
4,0	3,4	100	97	97	94	105	102	27
10,0	5,4	100	97	95	92	97	94	30
16,0	6,8	100	97	93	90	93	90	30
20,0	7,7	100	97	92	89	91	88	30
31,2	9,6	100	97	90	87	87	84	30
62,5	13,7	100	97	86	83	81	78	30
100,0	17,4	100	97	83	80	77	74	30
125,0	19,5	95	92	75	72	75	72	26
155,5	21,9	94	91	72	69	73	70	26
175,0	23,3	93	90	70	67	72	69	25
200,0	25,0	92	89	67	64	71	68	25
250,0	28,1	90	87	62	59	69	66	24
300,0	30,9	89	86	58	55	67	64	24
450,0	38,3	87	84	48	45	64	61	23
600,0	44,8	85	82	40	37	61	58	22
750,0	52,0	83	80	31	28	59	56	21
900,0	59,4	82	79	23	20	58	55	20
1000,0	63,1	80	77	17	14	57	54	20



## UC900 HS23 Cat.7

### Technical data

Product code	Cable type	Brand name	Outer diameter mm	Fire load		Weight kg/km	Copper content	Tensile force N
				MJ/km	kWh/m			
1001036	J-02YSCH 4x2x0.56 PiMF	UC900 HS23 Cat.7 S/FTP 4P LSHF	7.3	590	0.170	54.5	26	110
1001037	J-02YSCH 2x(4x2x0.56) PiMF	UC900 HS23 Cat.7 S/FTP 2x4P LSHF	7.2/15.0	1190	0.345	109.2	52	220
1001152	J-02YSCH 4x2x0.56 PiMF	UC900 HS23 Cat.7 S/FTP 4P LSHF-FR	7.8	575	0.1657	67.2	26	110
1001151	J-02YSCH 2x(4x2x0.56) PiMF	UC900 HS23 Cat.7 S/FTP 2x4P LSHF-FR	7.7/15.2	1170	0.3371	129	52	220